


**GENERAL NOTES:**

1. CONSTRUCTION AND MATERIALS SHALL MEET REQUIREMENTS OF ITEM 537 "WHEEL STOPS".
2. CONCRETE FOR WHEEL STOP: MINIMUM 3,000 PSI IN 28 DAYS
3. REINFORCING STEEL: PER ASTM A615, GRADE 60
4. ATTACHMENT PINS SHALL HAVE 7 INCH EMBEDMENT.

NO.	REVISIONS	DATE	NAME
1	UPDATED DEPARTMENT NAME	2/17/15	RS
△			
△			
△			

HARRIS COUNTY  
ENGINEERING DEPARTMENT

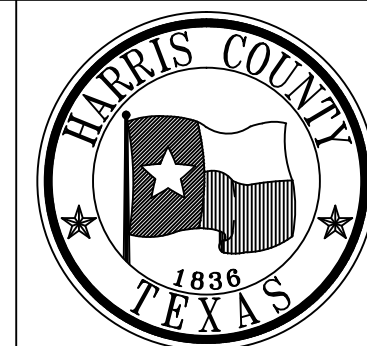

CONSULTANT  
LOGO/INFORMATION

FOR INTERIM REVIEW ONLY  
DOCUMENT INCOMPLETE:  
NOT INTENDED FOR CONSTRUCTION,  
BIDDING, OR PERMIT PURPOSES  
ENGINEER:  
P.E. SERIAL No.  
DATE:

PROJECT TITLE:		HCED STANDARD
DRAWN BY: JDZ	SHEET DESCRIPTION: PRECAST REINFORCED CONCRETE	20
CK'D BY: PDG	WHEEL STOP DETAILS	SHEET NO:
SCALE: 1"=6"	APPROVED BY:	/
DATE: 1/16/14		